


Product data sheet

Specifications

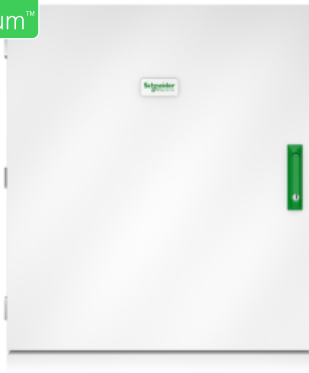

Parallel Maintenance Bypass Panel for 2 UPSs, 40-50kW 400V wallmount, for Galaxy VS and Easy UPS 3S

GVSBPAR40K50H

Overview

Presentation	Maintenance bypass panel for complete isolation of two UPSs in parallel during service operations.
Lead time	Usually Ships within 2 Weeks

Physical

Height	33.46 in (85 cm)
Width	29.53 in (75 cm)
Depth	9.84 in (25 cm)
Net Weight	110.23 lb(US) (50 kg)

Environmental

Ambient Air Temperature for Operation	32...104 °F (0...40 °C)
Ambient Air Temperature for Storage	-13...131 °F (-25...55 °C)

Ordering and shipping details

GTIN	731304367369
------	--------------

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	19.69 in (50 cm)
Package 1 Width	47.24 in (120 cm)
Package 1 Length	34.06 in (86.5 cm)
Package 1 Weight	165.35 lb(US) (75 kg)

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes

RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information
Optimized Energy Efficiency	Energy efficient product
Take-back	Take-back program available

Recommended replacement(s)