


Voice-Grade EC-Series Unscreened Keystone Jacks

KEY FEATURES

- Exceeds TIA-568-C.2 category 3 specifications for individual pairs
- Slim profile for the highest density applications
- Eco-friendly bulk packaging with a resealable bag
- Improved conductor retention with 90° 110 termination
- Easy-to-read 3-pair USOC wiring scheme color-coded label
- Compatible with Signamax screened snap-in patch panels and work area faceplates
- Circuit identification icons and dust covers included in kit

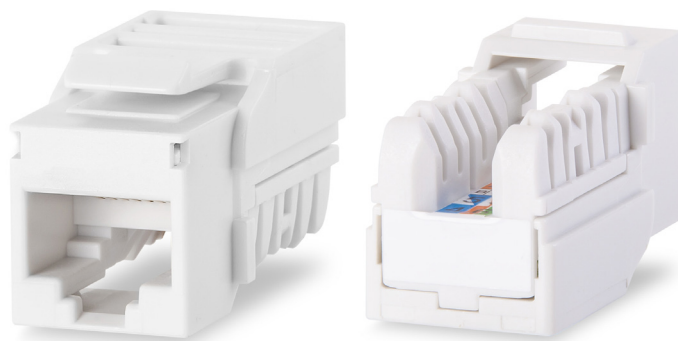

The Signamax Voice-Grade EC-Series Unscreened Keystone Jacks have been designed to meet the need for today's high-bandwidth applications. The 90° termination position eases tension from the connection at the jack and allows an installer to direct the cable straight back from the panel or faceplate and provides enhanced plug-to-jack connection integrity.

The contact design protects against damage caused by insertion of 4 or 6 position plugs and is rated for a minimum of 750 plug insertions. Special design features allow these jacks to be terminated with a standard 110 single-position tool or with the Signamax KJMT-8600, four-pair tool providing for the highest level of system reliability.

VOICE-GRADE EC-SERIES UNSCREENED KEYSTONE JACKS

PART NUMBER	DESCRIPTION
KJ126EC25-C3U	Voice-Grade 6P6C EC-Series Keystone Jack, USOC Wiring, Light Ivory, 25-Pack
KJ126EC25-C3U-WH	Voice-Grade 6P6C EC-Series Keystone Jack, USOC Wiring, White, 25-Pack

SPECIFICATIONS

TRANSMISSION PERFORMANCE

ANSI/TIA-568-C.2: meet or exceed individual-pair category 3 (up to 16 MHz) component specifications

TRANSMISSION MEDIA

Unscreened twisted pair (U/UTP)

JACK TYPE

6p6c (6-position, 6-contact) "RJ12" style

WIRING SCHEME

Three-pair USOC

WIRE GAUGE

22 to 24 AWG (0.644 to 0.511 mm)

ELECTRICAL

Insulation Resistance: Min 500 MOhm @ 100 Vdc

Dielectric Withstanding Voltage:

1,000 Vdc/ac peak contact-to-contact @ 60 Hz for 1 min

Spring Wire Contact Resistance: Max 20 mOhm

IDC Contact Resistance: Max 2.5 mOhm

FOOTPRINT

Standard keystone footprint

CONSTRUCTION

Housing: High impact thermoplastic, UL94V-0 fire retardant

Jack Spring Wire: Phosphor bronze alloy plated with 50 µin of gold over 70 to 100 µin of nickel

IDC: 110 type, phosphor bronze alloy with 100 µin 100% tin alloy

MECHANICAL

Retention: 50 N (11 lbf) for 60 ± 5 s

Mating Cycle Life: Min 750 cycles

MOUNTING DIMENSIONS:

1.29" D x 0.67" W x 0.76" H (32.7 mm x 16.9 mm x 19.3 mm)

ENVIRONMENTAL CONDITIONS

Operating Temperature: 14 °F to 140 °F (-10 °C to 60 °C)

Storage Temperature: -40 °F to 158 °F (-40 °C to 70 °C)

Operating RH: 93% Max (non-condensing)

COMPLIANCE

ANSI/TIA-568-C.2, IEC 60603-7, FCC Part 68 Subpart F, UL 94V-0

APPLICATIONS

X.21, V.11, S0/S1/S2 (ISDN BRI/PRI), ADSL, VDSL, TR-4, TR-16

WARRANTY

5 - Year Limited Component