

NOTES:

CONSTRUCTION:

1. Material: ABS UL 94V-0




ENVIRONMENTAL:

1. Storage temperature: -40 °C--+70 °C (-40 °F--+158 °F)

2. Operation temperature: -10 °C--+60 °C (+14 °F--+140 °F)

3. RH (operation): max non-condensing 93 %

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	A	A-FEB-14 SMB-85-37	FEB'14	

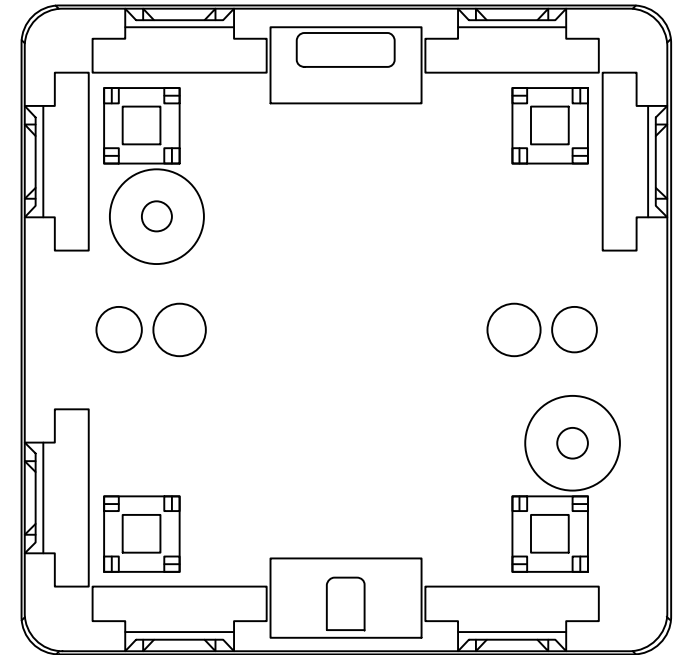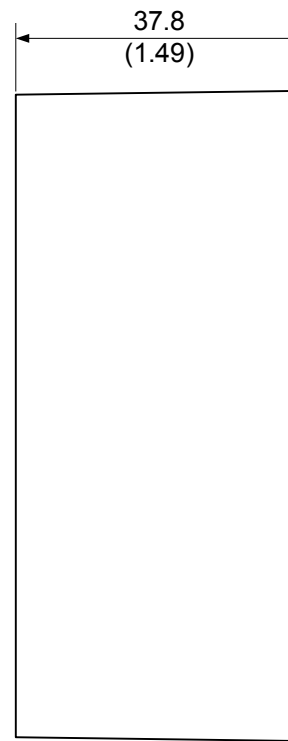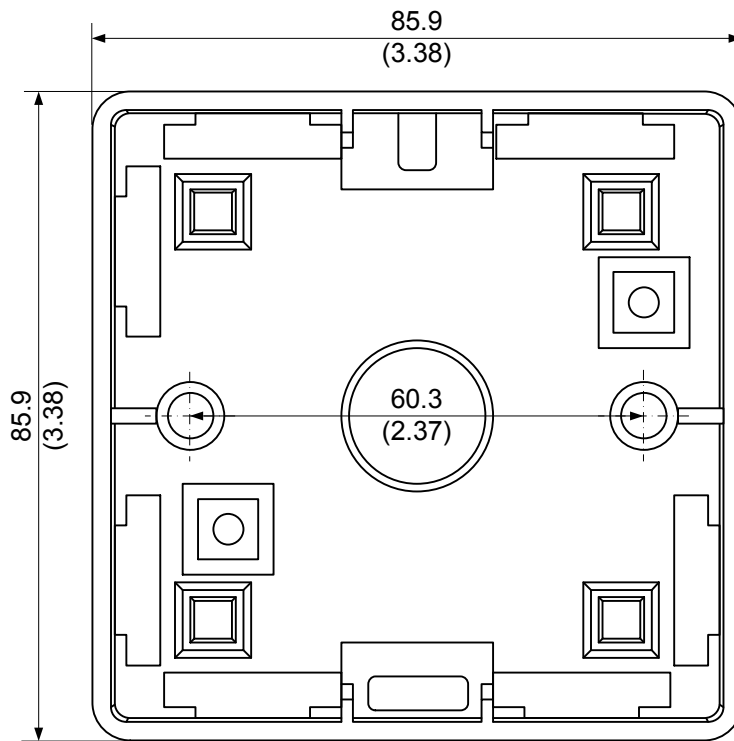

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN MILLIMETERS (INCHES)
TOLERANCES: MM IN ANGULAR
0.0: ±0.2 0.0: ±0.016 0 ±1°
0.00: ±0.1 0.00: ±0.008 0.0 ±0.5°
0.000: ±0.004

MATERIAL: AS NOTES
MECHANICAL: AS NOTES
ELECTRICAL: AS NOTES

SIGNAMAXTM
CONNECTIVITY SYSTEMS

PROJECT ID SPCS - PD		FILE SPCS - PD.SMB-85-37		FEB'14		999 NW 159 th Drive, Miami, FL 33169, PH: (305) 944-7710, FX: (305) 949-4483, www.signamax.com		
PROCESS	INITIALS	NAME		DATE		TITLE		
DRAWN						SMB-85-37 (Surface-Mount Box for 85x85-mm International Outlets)		
CHECK						SIZE	CAGE CODE	DWG. NO.
APPROVED						A		
						SCALE	1:1	UNIT MM (IN)
								SHEET 1 OF 1
								REV A