PSW5 is recommended.

• NDAA Compliant*

CAMMICW


Weather-resistant, Aluminum Alloy Construction-Silver

Features

- Constructed out of Aluminum alloy for outdoor use.
- Pickup indoors in rooms up to 120 sq. ft.
- Built-in high-speed voice processing
- Built-in self-gain control AGC processing circuit, which helps prevent signal distortion
- Built-in lightning protection, reverse polarity power protection and power protection module
- Integrated pre-amplification processing circuit
- Recommended transmission distance of 25' optional accessory UTPAUDIO is available for transmission up to one mile over UTP cable

Specifications

Range	10~120 ft. ²
Sensitivity	-43dB @ 1000 Hz
S/N	Max 65dB
Operating Voltage	9 - 12VDC, 25mA (max) (not included)
Dimensions	3″ diameter x 1″ (H) (75*25mm)
Connection Mode	Red (power), black (GND, signal to), white (audio signal)

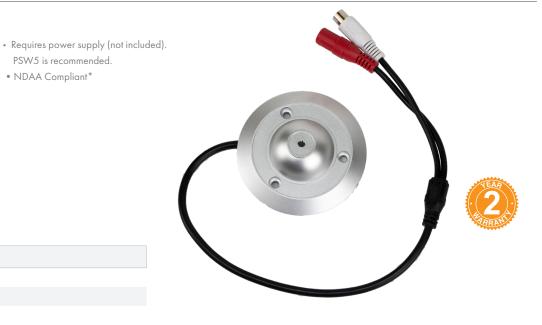

NDAA OMPLIANT

ucts are in compliance with NDAA Section 889 Part B Guidelines

Optional Accessories



PSW5

12VDC

Power Supply



UTP Audio Send Audio up to 1 mile over CAT5E

Speco Technologies is constantly developing and improving products. We reserve the right to modify product design and specifications without notice and without incurring any obligation. Spec Rev. 1/20/22

