




DM520P Push-to-talk Handheld Microphone

Thank you for your choice of Speco Technologies' **DM520P** handheld microphone. This unit is designed and manufactured to provide an economical solution for CB and professional communications. The sturdy, ergonomic construction ensures a long and versatile life.



CONNECTION DIAGRAM:

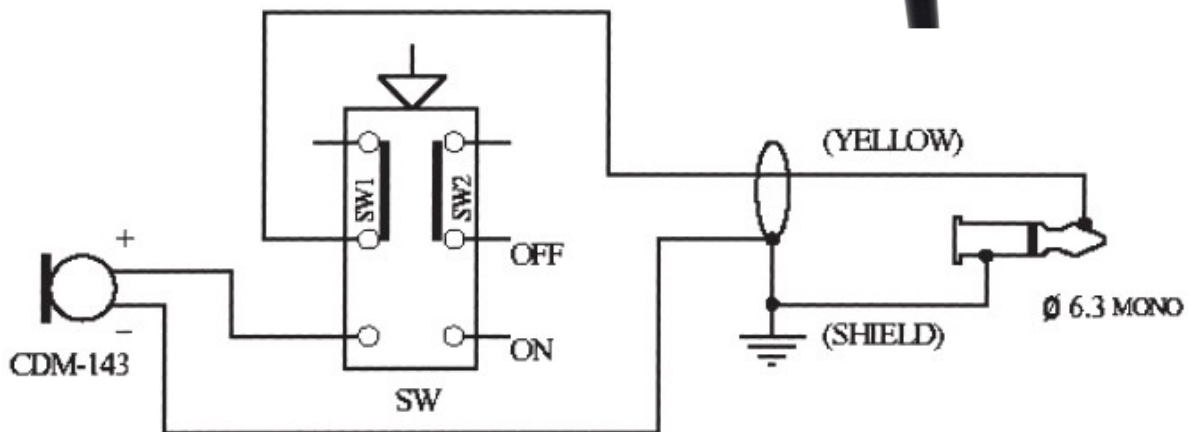

NOTE ON SWITCH TIMING: When Push to talk switch is pressed, SW2 contact closes before SW1 contact closes.

SPECIFICATIONS:

- Type: Dynamic Microphone
- Directivity: Omni-directional
- Impedance: 600 Ohms @ 1kHz (tolerance $\pm 30\%$)
- Sensitivity: $-78 \pm 3\text{dB}$ @ 1kHz re 1V/ μbar
- Frequency Response: 100 ~ 10kHz
- Connector: $\frac{1}{4}$ " unbalanced (TS) phono plug
- Dimensions: 2.4" (W) x 2" (D) x 4" (H) + 6' coiled cable
- Warranty: 2 Years (see Web Site for full terms and restrictions)

Speco Technologies is constantly developing and improving products.
We reserve the right to modify product design and specifications without notice and without incurring any obligation.

Speco Technologies . 200 New Highway . Amityville . NY . 11701 . www.specotech.com