speco technologies™

2-Cable HDMI® Extender

HDXTNDR 2-Cable HDMI Extender

Features

Great to tie into existing Cat5e or Cat6 infrastructure, or when you need to inexpensively get a signal a much longer distance than most HDMI cables would allow. Perfect for digital signage, surveillance, and home theater applications.

• Extends an HDMI signal up to 100' (30M) using two
  Cat5e or Cat6 cables
• Supports 3D HDMI signals
• Supports resolutions up to and including 1080p or
  1920x1080 on pass through
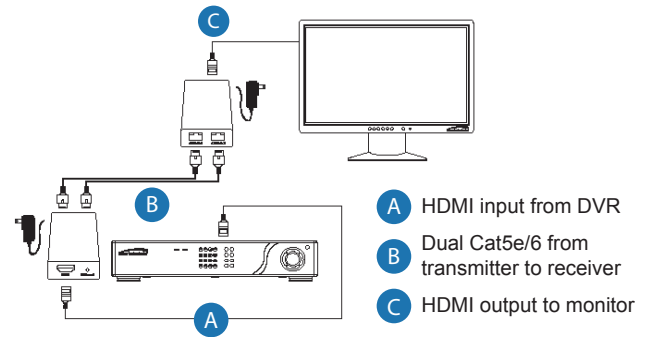

front of unit

rear of unit

Specifications

Operating Temperature................14º F – 176º F
Operating Humidity......................5% – 90% RH (no condensation)
Input Video Signal 1.2Vp-p
Data Transfer Speed Rate...........10.2Gbps (max.)
Power Supply ....5VDC (power supply included)

NDAA COMPLIANT

*Products are in compliance with NDAA Section 889 Part B Guidelines

A HDMI input from DVR

B Dual Cat5e/6 from transmitter to receiver

C HDMI output to monitor

HDMI®