



speco technologies®

MCHH100A – Professional Dynamic Handheld Microphone



Thank you for your purchase of the Speco Technologies MCHH100A Professional Dynamic Microphone. This microphone produces excellent high-fidelity audio, which makes it useful for a wide range of applications from speaking or paging to singing.



OPERATION GUIDE

- A) Insert the female end of the included cable into the end of the Microphone.
- B) Plug the male XLR plug end of the cable into an amplifier or mixer.
- C) Turn the microphone switch to the "ON" position and adjust the volume to the desired level.
- D) Operate the microphone within 2-4 inches of the sound source for optimal performance.
- E) Turn the switch to the "OFF" position when the microphone is not use.

****CAUTION****

Keep the microphone far away from the loudspeaker to avoid potentially damaging feedback. Don't tap the microphone while powered and avoid damaging the microphone. Don't store the microphone in exceedingly warm or moist environments.

Capsule Type:	Dynamic
Impedance (at 1KHz):	500 Ohms+/-20%
Sensitivity (0dB=1 v/pa at 1KHz):	-54dB+/-3dB
Polar Pattern:	Cardioid (Unidirectional)
Frequency Response:	50Hz-13KHz

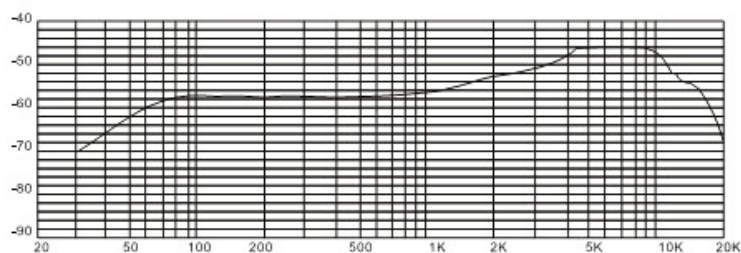

Speco Technologies is constantly developing and improving products.

We reserve the right to modify product design and specifications without notice and without incurring any obligation.

Speco Technologies • 200 New Highway • Amityville • NY • 11701 • www.specotech.com

Rev. 04/03/20