
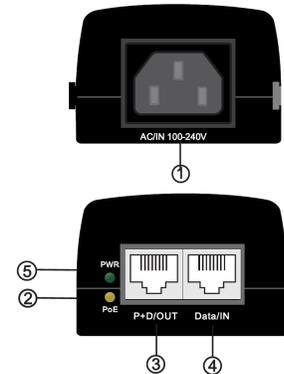


POEINJ – 802.3af/at Power Over Ethernet Injector

Thank you for your choice of Speco Technologies' **POEINJ** IP camera accessory. This unit is designed and manufactured to provide an economical solution for powering IP cameras using Power over Ethernet. The sturdy construction of these units ensures a long & productive life.

DESCRIPTION

The **POEINJ** is an Ethernet power device that will take a data signal from a network switch and power from the included AC power cable and transmit it over Cat5/5e/6 cable in a manner capable of powering and receiving images from a PoE capable camera.

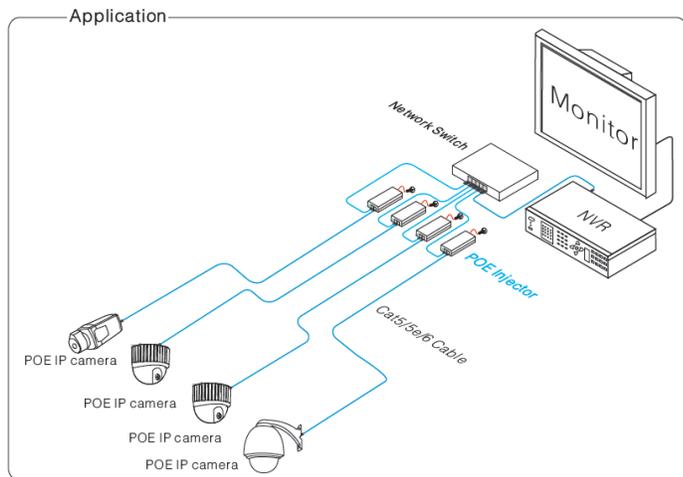

No.	Board	Description
1	AC/IN 100-240V	AC100V~240V Power Port
2	PWR	Power LED, On power input
3	PoE	PoE LED, On PoE signal output
4	Date IN	Ethernet Input Port
5	PoE OUT	PoE Signal Output Port

INSTALLATION INSTRUCTIONS:

- 1) Turn off power to the units and sources. Installing the **POEINJ** while power is live may damage the units.
- 2) Use an RJ45 network cable to connect the remote camera to the **POEINJ** through the P+D (Power + Data) /OUT connection.
- 3) Use an RJ45 network cable to connect your network switch with the **POEINJ** Data/In port.
- 4) Connect the power adapter.
- 5) Confirm all cables are connected securely and properly and power on all units.

SPECIFICATIONS:

- Ports: 1 x RJ-45 Output, 1 x RJ-45 Input
- Ethernet Speed: Up to 10/100/1000MBPS
- PoE Standards: IEEE 802.3at/af
- Power: 25.5W Max
- Operating temperature: 32°F to 131°F
- Storage temperature: -40°F to 185°F
- Operating humidity: 0% to 95%RH
- Dimensions: 4.7" (W) x 2.4" (H) x 1.5" (L)
- Weight: 0.5 Lbs.
- Warranty: 2 Years (please visit Specotech.com for full warranty terms and conditions)

Speco Technologies is constantly developing and improving products.
We reserve the right to modify product design and specifications without notice and without incurring any obligation.