


## TVIUTP – HD Video Transceiver (Balun)



### Features:

- Send HD-TVI signal up to 656' (200M) over UTP cable.
- BNC male to screw terminal for easy connection.
- Compact size allows mounting of multiple units behind multiplexers, Quads, DVRs, etc.
- Passive, No power required.
- Ideal for retrofits using existing UTP cable.
- Built in ESD, EFT (impulse noise), lightning (surge) and transient protection.
- Used in pairs (Sold individually)

### Installation View:

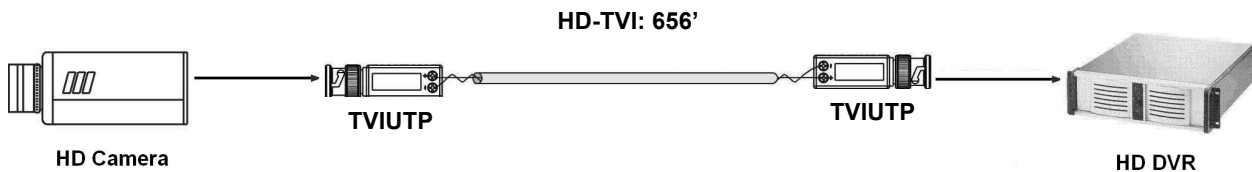

The maximum functional distance is 656'. The distance may be affected by the quality of components (cable, camera resolution, DVR, etc.).

### Item View:



### Specifications:

ITEM NO.	TVIUTP
Video Input (BNC Connector)	1
Video Input	1V p-p, 75 Ohms
Cable	Twisted Pair CAT 5
Bandwidth	50Hz ~ 60MHz ( -3dB )
Transmission Distance	HD-TVI: 656' (200M)
RJ-45 Output	Terminal
ESD protection	30 KV(Air) · 15 KV (Contact) ; IEC 61000-4-2 compliant
EFT protection	40A(5/50ns) ; IEC 61000-4-4 compliant
Lightning protection	2A (8/20µs) ; IEC 61000-4-5 compliant
Surge Protection Attack Time	< 1 nS
Environmental Specifications	Operation: 32°F to 131°F, Storage: -4°F to 185°F, Humidity: up to 95%
Dimensions L x W x H	.6" x 2" x .6"
Weight	0.04 LBS



Speco Technologies is constantly developing and improving products. We reserve the right to modify product design and specifications without notice and without incurring any obligation.

Speco Technologies ☐ 200 New Highway ☐ Amityville ☐ NY ☐ 11701 ☐ [www.specotech.com](http://www.specotech.com)